

STANDARD SPECIFICATIONS

BASIC CONSTRUCTION

- Patented Air-Flow contoured shape.
- Inert gas electro-welded high-strength steel undercarriage.
- Dura-Torque rubber torsion bar axles.
- Shock absorbers on all wheels.
- Tandem wheels on 22', 24', 26', and 28'.
- Single on 20'.
- 12 volt electric brakes on all wheels— can be coordinated with foot brake pedal in car.
- 15" truck type extra strength wheels with 7:00 x 15 nylon tubeless tires (8 ply on single axle models; 6 ply on tandem axle models).
- Hand riveted monocoque shell.
- Exterior protection: Automotive type alkyl enamel.
- Ribs of stretch-formed structural alloy aluminum.
- Interior walls of wear-resistant vinyl laminated to aluminum.
- One piece stretch-formed extruded aluminum window frames riveted to body.
- Exclusive contoured Jet-Seal awning-type Herculite safety glass windows.
- Panoramic front windows using super strength Herculite safety glass.
- Corrosion proof screens in all windows.
- Exclusive touch control fold away steel entrance step.
- Awning rail.
- Double walled fiberglass insulated wheel wells.
- 2¼ inch aircraft type fiberglass insulation.
- Adjustable no draft aluminum roof vents.
- Chrome hub caps.

ELECTRICAL EQUIPMENT

- A.N.S.I., D.O.H. and C.S.A. code approved wiring system.
- Single plug weatherproof car trailer connector (includes 12 volt charge line).
- One bulb, corrosion proof 180° visibility exterior clearance and running lights (installed in conformance with Federal Motor Vehicle Safety Standard 108).
- Automatic electric break-away switch.
- Back up lights.

- Built in 110 volt service line (25 feet).
- Extra capacity 72 ampere hour 12 volt battery; built in sealed and vented battery
- Three position Univolt 4 bulb ceiling lights compartment.
- One knob variable position ceiling vents.
- Exclusive ferro resonant Univolt to convert 110 volt city power to 12 volt direct current power and automatically charge battery.
- Automatic resetting circuit breaker.
- Overload safety fuse cartridges in Univolt wiring system.
- High intensity adjustable reading lights.
- Circuit breakers on 110 volt wiring system.
- Polarity warning light.

PLUMBING

- A.N.S.I., D.O.H. and C.S.A. code approved plumbing system.
- High volume water pressure regulator in water inlet line.
- Univolt water pump (capacity 3 gallons per minute).
- 30 gallon polyethylene water tank.
- Swing faucet at galley sinks.
- Stainless steel galley sinks. (Color coordinated.)
- Exclusive all thermo formed bathroom with bathtub in rear bath 26', 28', shower room in 20', 22', 24' and 28' center bath.
- Built in medicine chest and mirror
- Telephone shower head.
- Mechanical seal toilet.
- Polyethylene holding tank.
- Drainage drop out cover cap.
- Drainage drop out elbow for connecting sewer hose.
- Built in sewer hose carrier.
- Accessible dump valve.
- Lockable, flush water fill.

GAS EQUIPMENT

- A.N.S.I., D.O.H. and C.S.A. code approved gas system.
- All gas equipment U.L. or A.G.A. and C.S.A. approved for use in travel trailers.

- Double five gallon gas bottles with rack.
- Sealed outside vented heater (input ratings: 20', 22' = 16,000 BTU; 24', 26', 28' = 22,000 BTU).
- Automatic heater thermostat.
- Univolt sealed combustion system with forced air circulating ducts.
- Gas/electric combination refrigerator: 4.5 cubic foot in 20' and 22'. 6.0 cubic foot in 24', 26' and 28'.
- Gas range with oven and broiler.
- Range vent hood.
- 6 gallon gas water heater.

FURNISHINGS


- Exclusive Perma-Tech furniture construction featuring heat treated anodized aluminum framework with textured vinyl panels.
- Lightweight warp free hollowcore doors.
- Tambour doors in all roof lockers and under all beds.
- Posi-Lok latches on all cabinet doors.
- Lightweight injection molded drawers.
- Credenza fold away table in all models with front travel lounge.
- 5 inch foam mattresses in bedroom with zippered covers.
- Nylon shag carpet in all areas.
- All upholstery treated with SCOTCHGARD repeller to resist soiling.
- All draperies fade resistant and self lined.
- Decorator styled washable vinyl window shades at galley and bathroom windows.
- Slide away bathroom door.
- Bedroom vinyl folding door. (24', 26' and 28' only).
- Choice of three color schemes.

DIMENSIONS:

- Outside floor width . . . 7'8".
- Outside height from ground . . . 8'10".
- Inside height (floor to ceiling) . . . 6'7".
- Ground clearance . . . 16" to underbelly. 12.24" to axle tube.
- Recommended hitch ball height . . . 19½".
- All specifications subject to change without notice.

ARGOSY 1976

CHOOSE FROM ELEVEN LUXURY MODELS

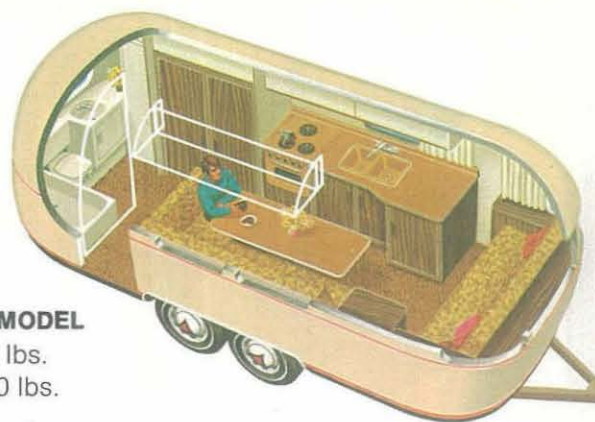

**ARGOSY 22
REAR DOOR MODEL**
Hitch Wt. 410 lbs.
Total Wt. 3720 lbs.




ARGOSY 20
Hitch Wt. 470 lbs.
Total Wt. 2880 lbs.




**ARGOSY 24
TWIN BED MODEL**
Hitch Wt. 560 lbs.
Total Wt. 3610 lbs.




ARGOSY 22
Hitch Wt. 560 lbs.
Total Wt. 3360 lbs.

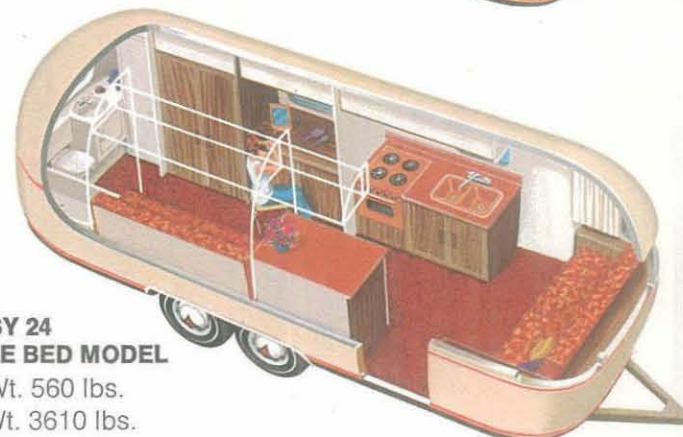

**ARGOSY 24
DOUBLE BED MODEL**
Hitch Wt. 560 lbs.
Total Wt. 3610 lbs.

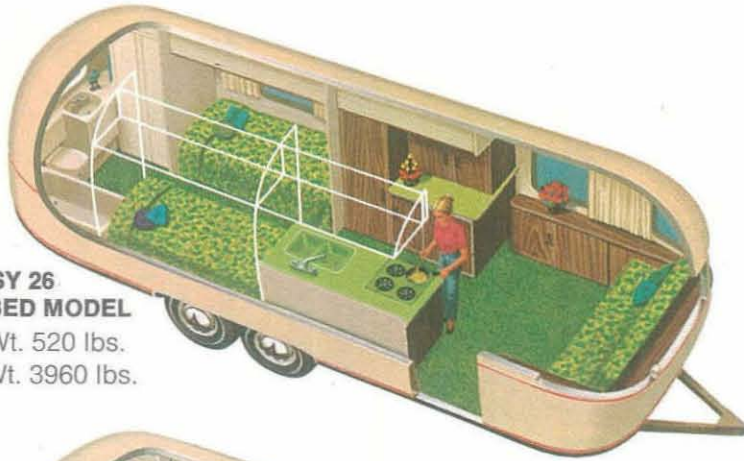


**ARGOSY 26
TWIN BED MODEL**
Hitch Wt. 520 lbs.
Total Wt. 3960 lbs.

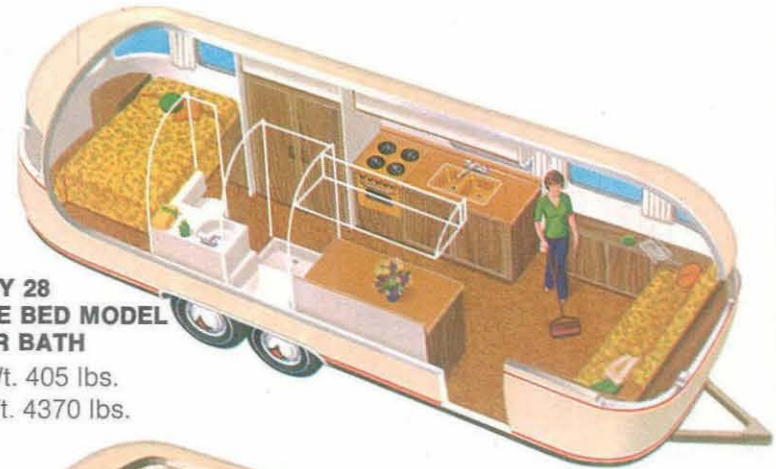

**ARGOSY 28
DOUBLE BED MODEL
CENTER BATH**
Hitch Wt. 405 lbs.
Total Wt. 4370 lbs.




**ARGOSY 26
DOUBLE BED MODEL**
Hitch Wt. 520 lbs.
Total Wt. 3960 lbs.

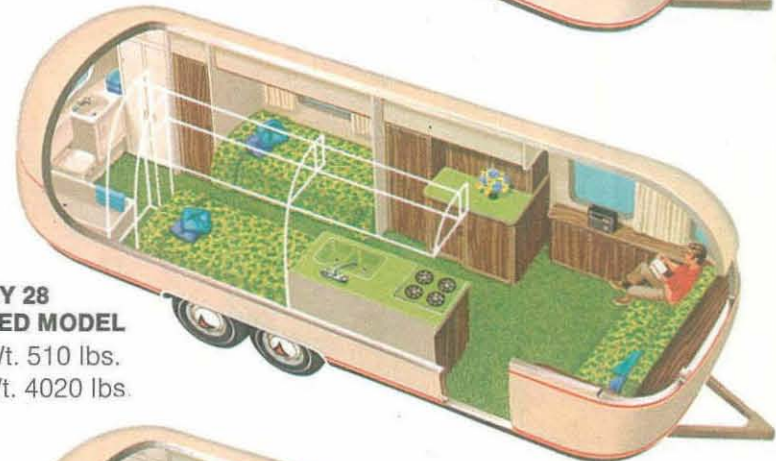

**ARGOSY 28
TWIN BED MODEL**
Hitch Wt. 510 lbs.
Total Wt. 4020 lbs.



**ARGOSY 28
TWIN BED MODEL
CENTER BATH**
Hitch Wt. 405 lbs.
Total Wt. 4375 lbs.

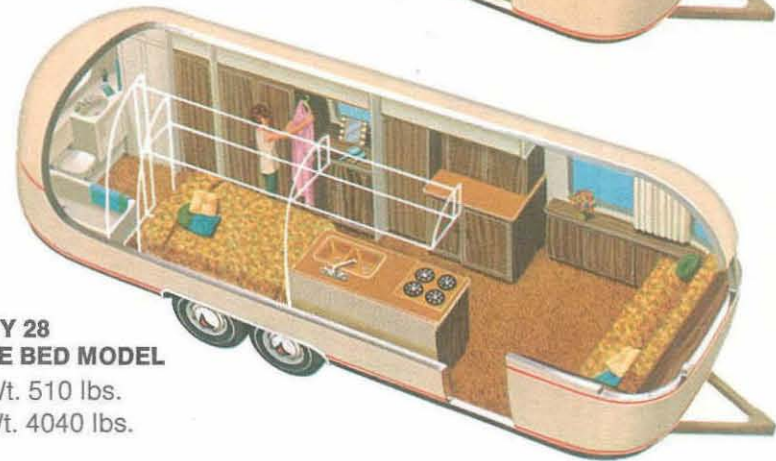

**ARGOSY 28
DOUBLE BED MODEL**
Hitch Wt. 510 lbs.
Total Wt. 4040 lbs.