

THE BAMBI TRAVEL TRAILER STANDARD FEATURES AND OPTIONS

Chassis

- 4500-lb. GVWR
- 4300-lb. Axle System
- Spoked Steel Wheels
- Radial Black Wall Tires, LRC 15"
- 12" Electric Drum Brakes
- Rear Stabilizer Jacks w/Pads (2)
- Steel Step
- Manual Hitch Jack
- Spare Tire w/Bracket (after #512011)

Windows and Doors

- S.P. Solar Grey Windows
- Automotive Styled Main Door Lock
- Frosted Window in Door
- Rear Access Trunk Door

Exterior

- Patio Awning C.S. 9' 8"
- LP Bottle Cover
- One-piece Stoneguard
- Painted Rear Bumper w/Sewer Hose Storage
- Bright Aluminum Finish/White Roof Finish
- Bambi Graphics
- License Plate Bracket
- Grab Handle
- Enclosed/Insulated Underbelly
- R.S. Awning Rail

Galley

- Laminated Galley Top w/Oak Edge Trim
- Spice Rack
- Sink Cover (1)
- Porcelain Sink, Single Bowl
- Oak Vinyl Inserts on Refrigerator
- Chrome Faucets
- Fixed Dinette 42" x 74"
- Pantry Storage

Entertainment & Sound

- AM/FM Cassette Stereo w/2-speakers, Analog Tune, CD Input Jack, Headphone Jack, 5 Band Graphic Equalizer & 18 Preset Stations
- TV Antenna w/1 Outlet, Cable & Telephone Hook-up

Bedroom

- Corner Double Bed 48" x 75"
- R.S. Wardrobe
- Quilted Bedspread
- Innerspring Mattress
- Removable Storage Boxes Under Bed (2)
- Bed Pillows (2)

Interior

- Towel Bar (1)
- Mirrored Medicine Cabinet Above Sink (2)
- Pull Shade at Galley Window
- Full Close-out Drapes, Except Galley
- Oak Vinyl Interior
- Front & Rear Overhead Roof lockers w/Edgeband Doors
- Fabric-covered Interior Skin
- Decorative Bath Vinyl
- Bi-fold Shower Door
- Hinged Bath Door
- Fiberglass Shower w/Soap Dish
- Entrance Mat
- Fabric Valances
- Oak Interior w/Edgeband Cabinet Doors


Electrical

- One Coach Battery
- 50-amp Converter w/Wall Switch
- TV Jack w/12-volt Outlet (1)
- 12-volt Kill Switch (Battery)
- Incandescent Lighting
- 120-volt Exterior Outlet
- Step Light
- Exterior Light Pkg: Dump Valve & Exterior Compartment Lights
- Water Pump Switch at Galley
- 7-way Trailer Plug
- GFI Protection for Bath & Exterior Outlet

Appliances

- Three-burner Cooktop w/Oven
- 11,000 A/C w/Heat Strip & Manual Control
- 16,000 BTU Furnace w/Electronic Ignition
- 4.0 Cu. Ft. 2-way Refrigerator

Model 19 C

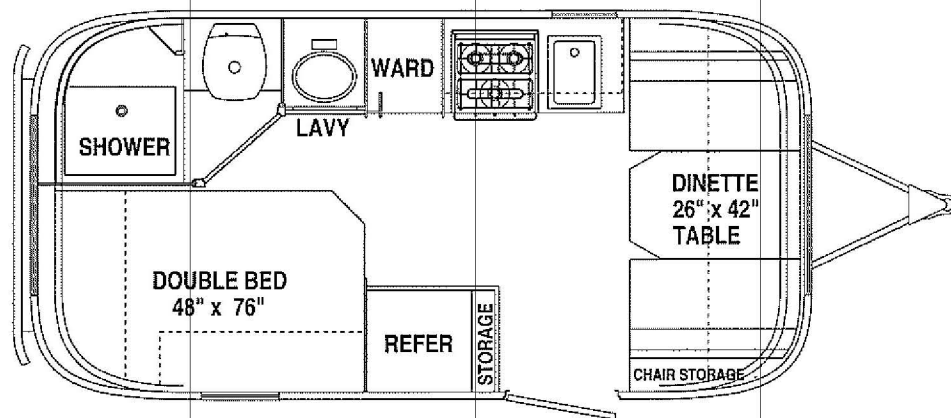

- Tank Monitoring System (Wall Mounted)
- 6-gallon Water Heater w/DSI
- Smoke Detector
- Range Hood w/Vent & Light
- Non-powered Ceiling Vents (2)
- Fire Extinguisher
- LPG Detector
- Bath Exhaust Fans (12-v)

Systems

- 30-lb. Steel LPG Bottles w/o Gauges (2)
- Shower Head w/Shut-off
- Lockable Water Fill
- Water Pressure Regulator
- Automatic 2-stage Regulator
- Water Heater By-pass Kit

Specifications

• Exterior Length	19' 2"
• Exterior Width	8'
• Exterior Height w/ AC	9' 5"
• Interior Width	7' 7"
• Interior Height	6' 3 1/2"
• Hitch Ball Height	15 3/4"
• Hitch Weight	500#
• GVWR	4500#
• UYW	3600#
• NCC	900
• Fresh Water (gal.)	24 1/2
• Grey Water (gal.)	21
• Black Water (gal.)	8

Product information, specifications and photography in this brochure were as accurate as possible at time of printing. Since we continually strive to improve our products, actual products may differ. Prices and specifications are subject to change without notice. All capacities are approximate and dimensions are nominal. Some features or options may be different or unavailable in Canada.

Vehicle Loading—Every effort has been made to provide the greatest number of options for the recreation vehicle owner. Along with these choices comes the responsibility to manage the loads that are imposed by the choices so that they remain within the manufacturer's specified chassis weight limits. Do not overload the recreation vehicle.

Dry weights based on standard features; optional equipment not included. Net carrying capacity (NCC) determined by subtracting unloaded vehicle weight (UVW) from gross vehicle weight (GVWR) and includes fluids, options and cargo. Liquid capacities and weights are approximations only.

Warning: This information is intended as a guide only. Weights of individual vehicles may vary. Consult your owner's manual for complete loading, weighing and towing instructions.