
## 2006 AIRSTREAM FLOORPLANS & SPECIFICATIONS

## INTERSTATE TOURING COACH






Interstate Dinette Twin

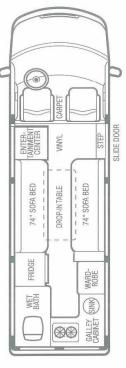

Interstate Front Sleeper

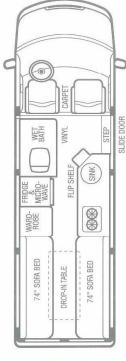

Interstate Rear Sleeper

00

	Diffette Twiff		
Interstate Touring Coach	22' Dinette Twin	22' Front Sleeper	22' Rear
Exterior height with A/C	9'	9'	9'
Exterior length	22'	22'	22'
Exterior width (at the running boards)	7'1"	7'1"	7'1"
Interior head room	6'1"	6'1"	6'1"
Interior width at floor	68"	68"	68"
2500 DaimlerChrysler Sprinter van	STD	STD	STD
Mercedes - 2.7 liter turbo charged 5 cylinder diesel	STD	STD	STD
UBW (lbs)	6,453	6,453	TBD
NCC (lbs)	2,097	2,097	TBD
GVWR (lbs)	8,550	8,550	8,550
Seating capacity / sleeping capacity	6/2	6/2	6/2
Fuel tank capacity (gal)	26.4	26.4	26.4
Water tank with drain valve (gal)	30	30	26.5
12V heated combo gray & black holding tank (gal)	31	31	N/A
12V heated black tank (gal)	N/A	N/A	20
12V heated gray tank (gal)	N/A	N/A	18
LPG (lbs)	23	23	23
Water heater (gal) with electronic ignition	6	6	6
Furnace (BTU)	12,000	12,000	12,000
Fridge (cu. ft.)	3	3	3



Please visit www.airstream.com for a full set of specifications, floorplans, features and options, or visit your nearest Airstream dealer.

Warning this information is intended as a guide only. Specifications are subject to change without notice. Weights of individual vehicles may vary. Consult your owner's manual for complete loading, weighing, and towing instructions.

Vehicle Loading every effort has been made to provide the greatest number of options for the recreation vehicle owner. Along with these choices comes the responsibility to manage the loads that are imposed by the choices so that they remain within the manufacturer's specified chassis weight limits. Do not overload the recreation vehicle.

Dry Weights based on standard features; optional equipment not included. Net Carrying Capacity (NCC) determined by subtracting Unit Base Weight (UBW) from Gross Vehicle Weight Rating (GVWR). Liquid capacities and weights are approximations only.